Electrolux

# Refrigeration
# SMART 1 Door Roll-in Refrigerator (33 FT³)

ITEM # ____________________

MODEL # ____________________

PROJECT NAME # ____________________

SIS # ____________________

AIA # ____________________



**Refrigeration**
**SMART 1 Door Roll-in Refrigerator (33 FT³)**

| | |
|---|---|
| **726674 (R193RE1FEU)** | 33 FT³ Full Size Refrigerator<br>1 door 115 V/1p/60Hz |
| **727024 (RI93R1FERU)** | 33 FT³ Full Size Refrigerator<br>remote version |

## Short Form Specification

**Item No.** ____________________

The Electrolux range of refrigerated cabinets are built with external and internal in AISI 304 stainless steel. Insulation thickness of 2.36″ (60 mm). Right hinged full door with lock. Bottom door gasket adjustable. Built-in refrigeration unit; ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch. Operating temperature 28 to 50 °F (-2 to 10 °C). For ambient temperatures up to 110 °F (43 °C). CFC and HCFC free. R134a gas in refrigeration circuit. Gas in foam: cyclopentane.

Covered by Electrolux Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance check-up after one year from installation.

C US ENERGY STAR



5-15P

Approval: ____________________

## Main features

**EASY TO INSTALL**

- Excellent space optimization, thanks to the compact dimensions (footprint = 0.56 m²) .
- Plug-in installation: 1 phase, 120 V supply.
- Available with built-in refrigeration unit and with full stainless steel door.

**EASY TO CLEAN**

- The whole interior cell is constructed of AISI 304 stainless steel with round corners for a better internal cleanability. There are no obstructions or dirt traps.
- Evaporator and fan are outside the cell.
- External panels are in AISI 304 stainless steel for better cleanability.

**EASY TO USE**

- Designed to operate at ambient temperatures of up to 110 ºF (43 °C).
- Automatic defrost.
- Simple control panel: on/off switch, high/low humidity switch, digital temperature display.
- Ventilated cooling for the best temperature distribution.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys (922007).

**EASY TO MAINTAIN**

- Bottom door gasket adjustable.
- All models finished in top quality materials to guarantee durability.
- Lift-up control panel to better access the main components.

**EASY ON THE ENVIRONMENT**

- 100% CFC and HCFC free. Refrigeration circuit: R134a gas. Gas in foam: cyclopentane.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.

## Optional Accessories

- Basic HACCP Printer (PNC 880048)
- 20 rack trolley for 201 with 2.5″ pitch (PNC 922007)


**Electrolux Professional, Inc.**
www.electroluxusa.com/professional
3225 SW 42nd Street, Fort Lauderdale, Florida, 33312 • Telephone Number: 866-449-4200 • Fax Number: 954-327-6789

Electrolux
Refrigeration
SMART 1 Door Roll-in Refrigerator (33 FT³)


Electrolux

# Refrigeration
# SMART 1 Door Roll-in Refrigerator (33 FT³)

### Front View

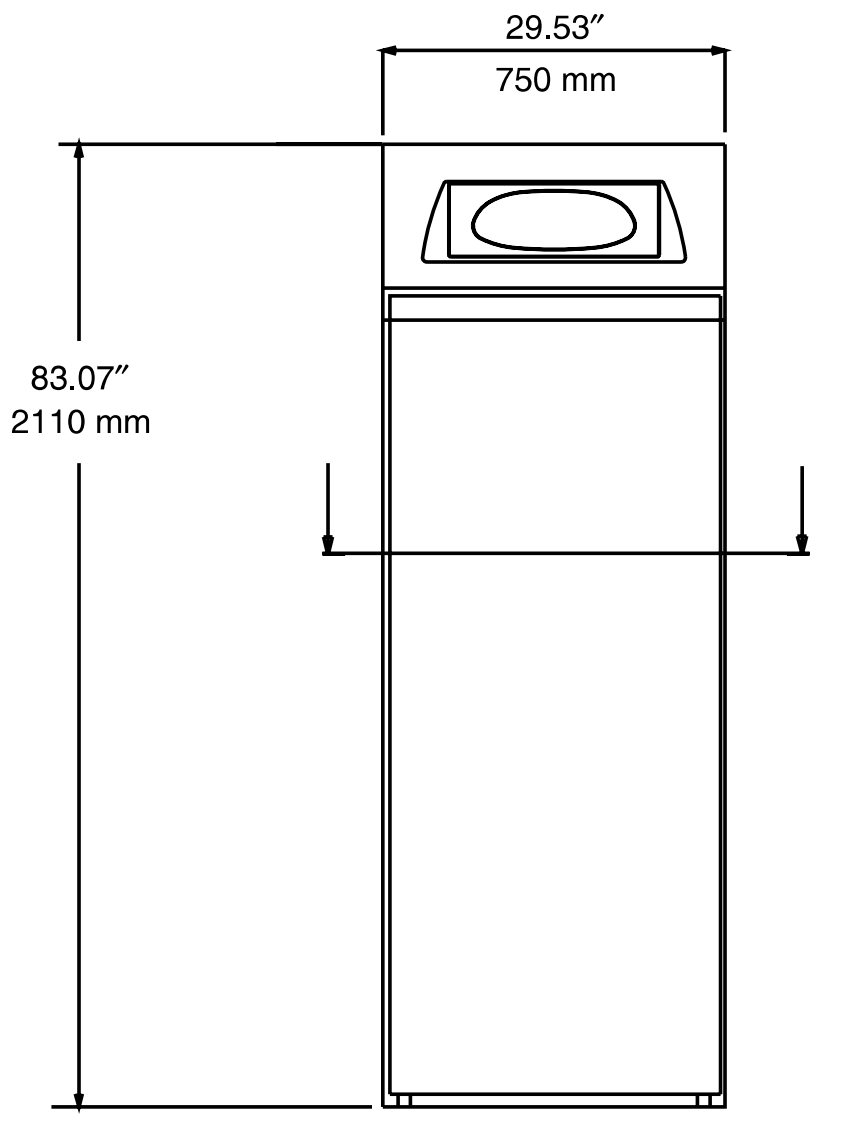



### Top View

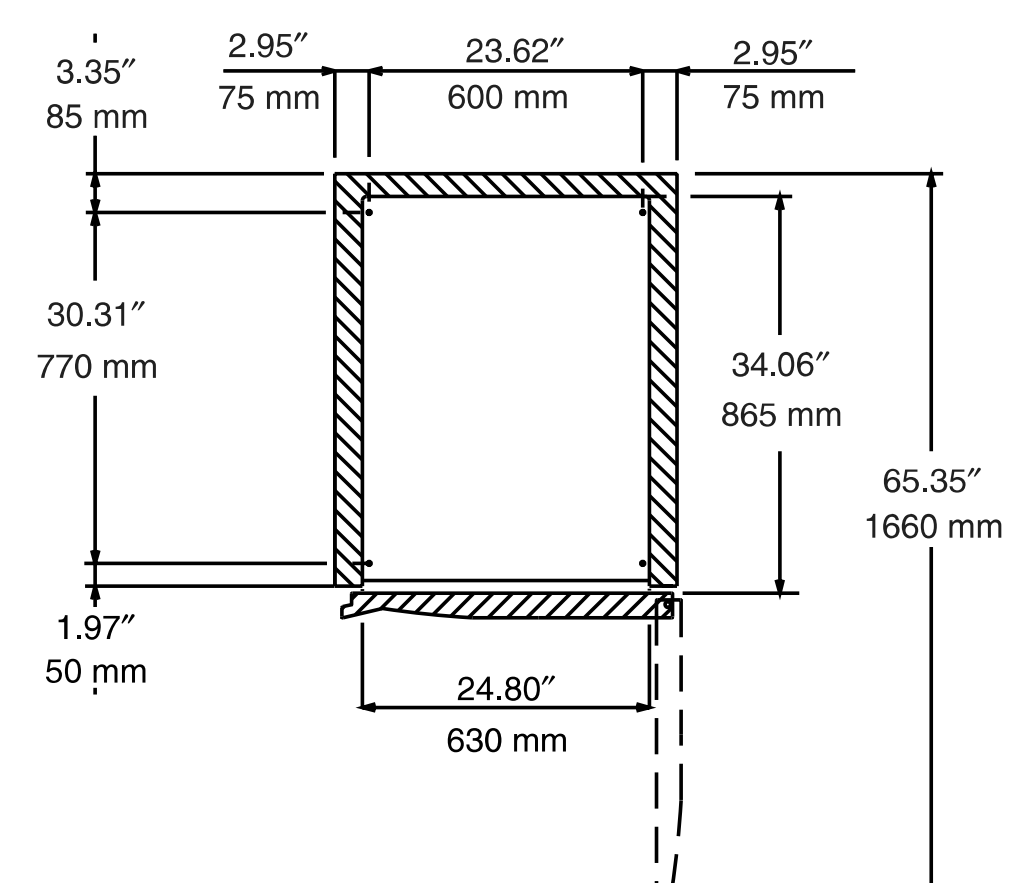


EC = Electrical connection

### Side View

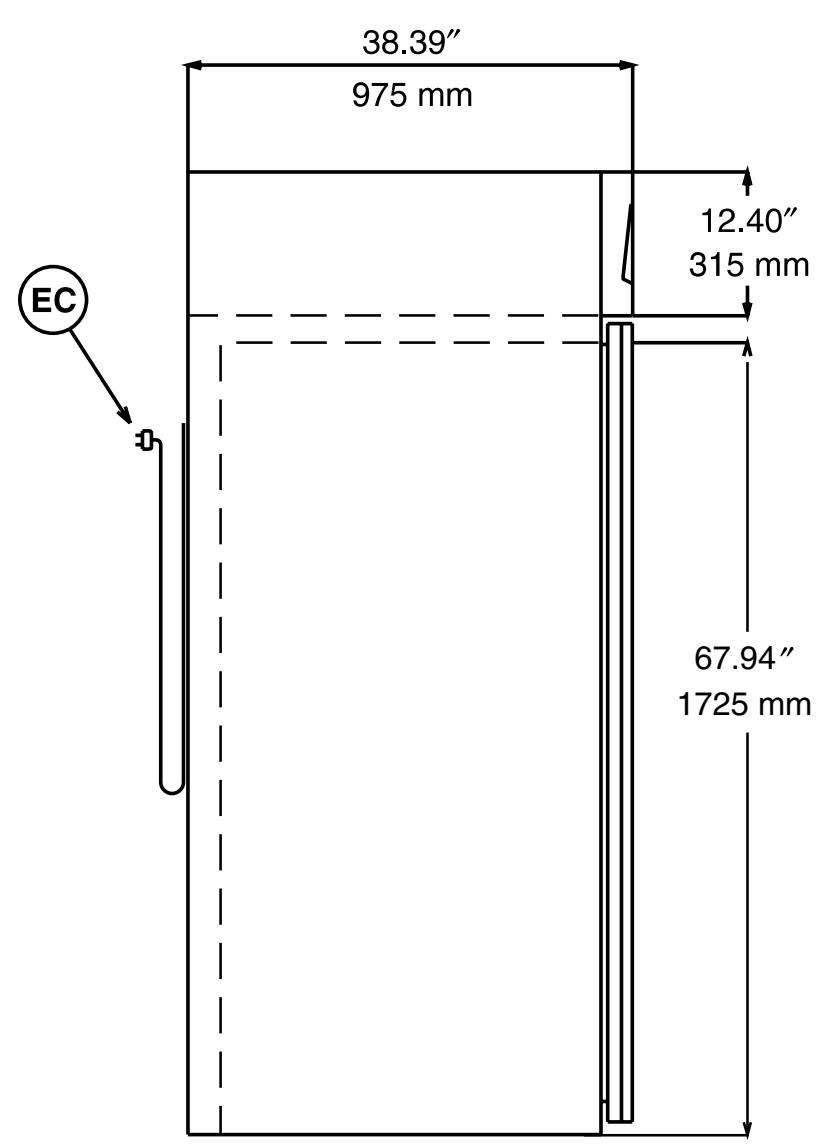


## Electric

**Supply voltage:**

**726674 (R193RE1FEU)** 115 V/1p/60Hz - 8A
**727024 (RI93R1FERU)** 115 V/1p/60Hz - 8A (Remote Version)

## Key Information

**LEGEND**

| | |
|---|---|
| **C** - Water Drain | 1/2″ (12.7 mm) |
| **I** – Electrical Connection | 115 V/1p/60Hz |

**TECHNICAL DATA**

| | |
|---|---|
| **Operating temperature min.:** | 28 °F (-2.22 °C) |
| **Operating temperature max.:** | 50 °F (10 °C) |
| **Built-in Compressor and Refrigeration Unit** | |
| **External Dimensions:** | |
| **Width**: | 29-1/2″ (749 mm) |
| **Depth**: | 38-9/16″ (979 mm) |
| **Height**: | 83-1/16″ (2110 mm) |
| **Internal dimensions:** | |
| **Width:** | 24-13/16″ (630 mm) |
| **Height:** | 67-15/16″ (1725 mm) |
| **Depth:** | 34-1/16″ (865 mm) |
| **Min/Max internal humidity % :** | 50/ 80 |
| **Number and type of doors:** | 1 Full |
| **Door hinges:** | Right |
| **Number and type of grids (included):** | 4, GN 1/1 |
| **Compressor power:** | 3/8 HP |
| **Refrigerant type:** | R134a |
| **Refrigerant quantity:** | 260g |
| **Refrigerant Power:** | 523W |
| **Power:** | 460 watts |
| **Net weight:** | 317 lbs (144 kg) |